


# CART

# INSTALLATION INSTRUCTIONS

Illustration 1

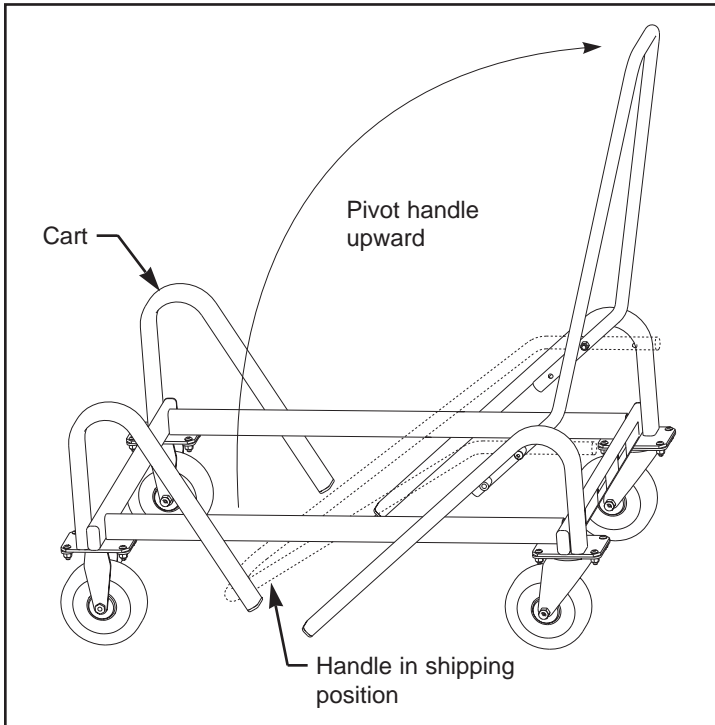

Read all instructions and review illustrations before installing.

Tools required for assembly:  
 $\frac{7}{16}$ " box end wrench  
Adjustable wrench (optional)  
 $\frac{5}{32}$ " Allen wrench (provided)

This assembly includes:  
(1) Cart  
(2) Hex head bolt (hardware pack)  
(2) Self locking nut (hardware pack)  
(1)  $\frac{5}{32}$ " Allen wrench (hardware pack)

**Installation:**

1. Refer to Illustration 1. Pivot handle upward and hold in position.

**NOTE**

Depending on cart model purchased, pivot nut and bolt (refer to Illustration 2) may be installed in the top or bottom hole of cart handle.

2. Refer to Illustration 2. On left side of cart, align hole in handle with bolt sleeve in cart. Insert bolt (from hardware pack) into bolt sleeve and through hole in handle.
3. Refer to Illustration 2. Install nut (from hardware pack) onto bolt and use the  $\frac{5}{32}$ " Allen wrench (from hardware pack) and  $\frac{7}{16}$ " box end wrench to fully tighten nut.
4. Refer to Illustration 2. Use the  $\frac{5}{32}$ " Allen wrench and  $\frac{7}{16}$ " box end wrench to fully tighten pivot nut and bolt.
5. Repeat Steps 2 through 4 for right side of cart.

Illustration 2

