


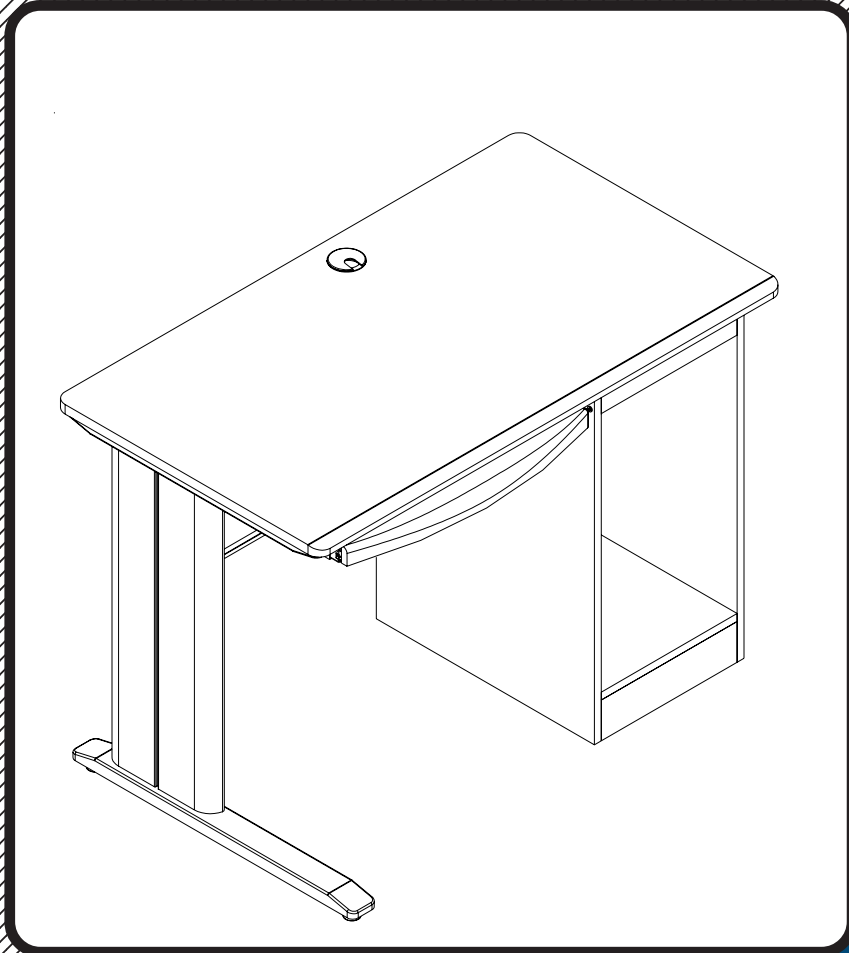

**#89843 LX-48**































# **Single Student Training Table**

Teak w/Black Metal Legs



## **Assembly Instructions**
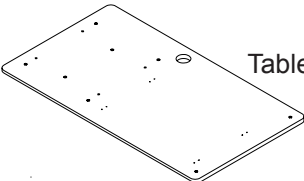
# #89843 Single Student Training Table

Part	Drawing	Description	Qty	Part	Drawing	Description	Qty
P-1		Left Side Panel	1 EA	P-14		Keyboard Bracket	4 EA
P-2		Right Side Panel	1 EA	P-15		Keyboard Slide	2 EA
P-3		Bottom Panel	1 EA	<b>Hardware List</b>			
P-4		Table Top	1 EA	A		Socket Screw M6X28mm	4 EA
P-5		Top Support	2 EA	A1		Phillips Screw M6X12mm	2 EA
P-6		Top Front Brace	1 EA	A2		Phillips Screw M6X25mm	4 EA
P-7		Bottom Front Brace	1 EA	A3		Phillips Screw M4X6mm	4 EA
P-8		Back Panel	1 EA	B		Wood Screw 2 1/4"	4 EA
P-9		Upper Leg Mount	1 EA	B1		Black Wood Screw 1/2"	4 EA
P-10		Lower Leg Mount	1 EA	B2		Silver Wood Screw 1/2"	12 EA
P-11		Leg Upright	1 EA	C		Cam Lock	8 EA
P-12		Metal Panel	1 EA	D		Cam Post	8 EA
P-13		Plastic Keyboard Tray	1 EA	E		1" Wood Dowel	20 EA
				F		Leveling Glide	2 EA
				F1		Glide	4 EA
				G		Grommet Sleeve	2 EA
				H		Grommet Cap	2 EA
				J		Allen Wrench	1 EA


Tools required: Phillips Head Screwdriver/Hammer

# #89843 LX-48


## Assembly Diagram

### To Assemble:

1. Identify and Separate all the Parts and Hardware.
2. Place Leg Upright (P-11) on a flat surface as shown in illustration # 1.  
[ with 2 large holes facing up ]
3. Attach Upper Leg Mount (P-9) and Lower Leg Mount (P-10) using 4 each Phillips Screws (A2) as shown in illustration # 1.

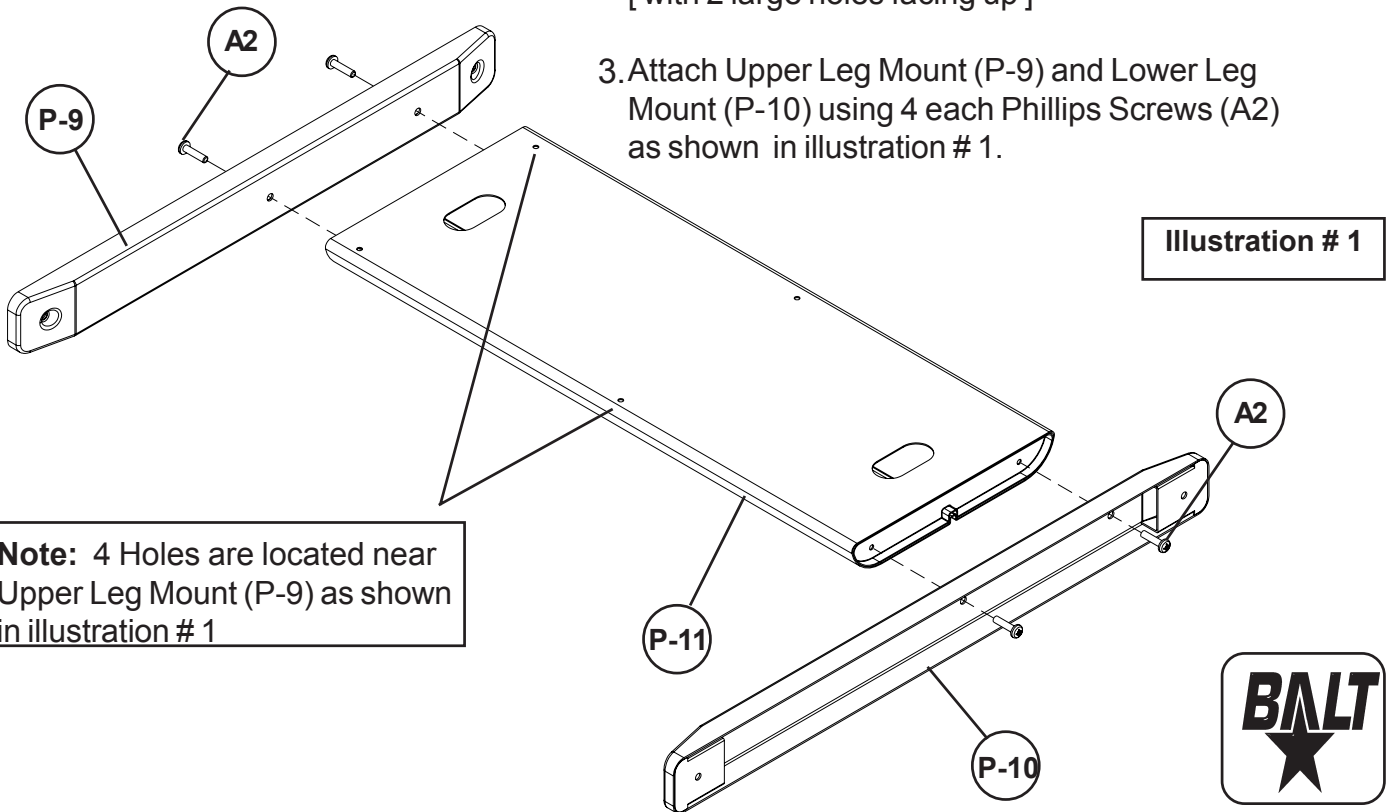


4. Place the Left Side Panel (P-1) with the Predrilled holes facing up and install 2 Cam Posts (D) in the 2 threaded insert nuts (Pre-installed) as shown in illustration # 2.
5. Install 2 Cam Locks (C) in the 2 large holes.
6. Install 8 Wood Dowels (E) into the holes as shown in illustration # 2.

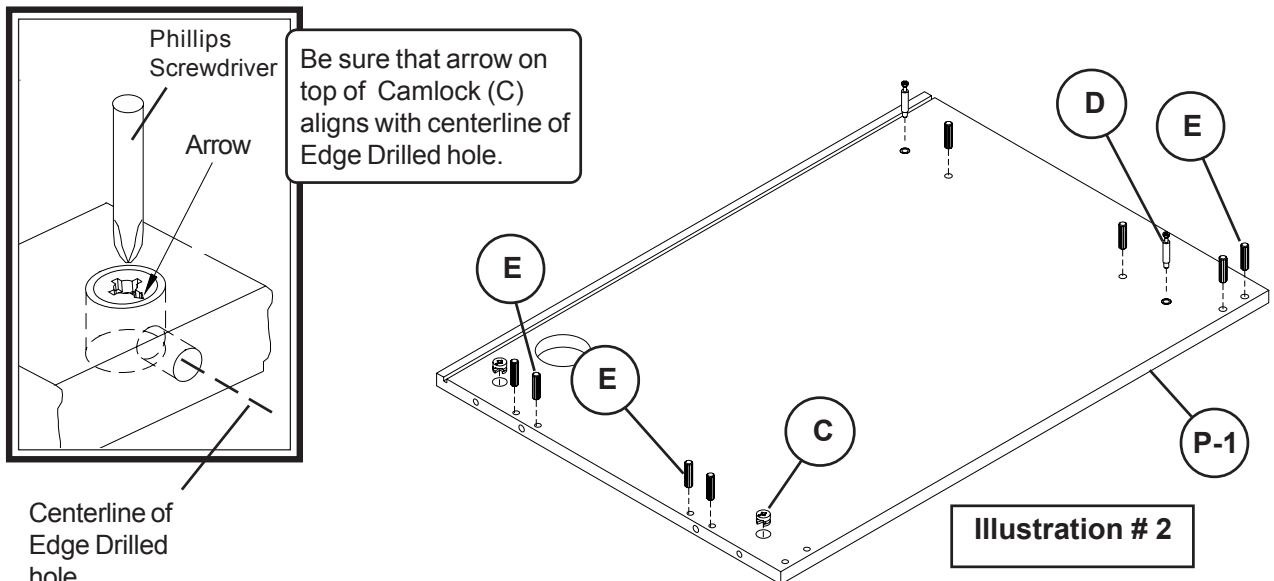

Note: Camlocks can be turned with Allen Wrench, or Large Phillips Screwdriver

7. Place the Right Side Panel (P-2) with the Predrilled holes facing up and install 2 each Cam Posts (D) in the 2 threaded insert nuts (Pre-installed) as shown in illustration # 3.

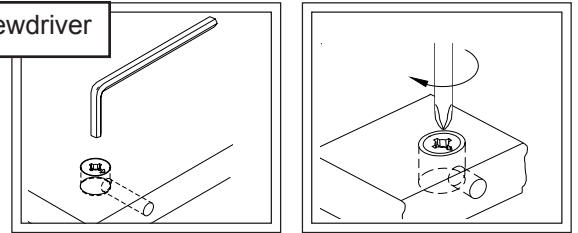

8. Install 2 each Cam Locks (C) in the 2 large holes.

9. Install 8 Wood Dowels (E) into the holes as shown in illustration # 3.


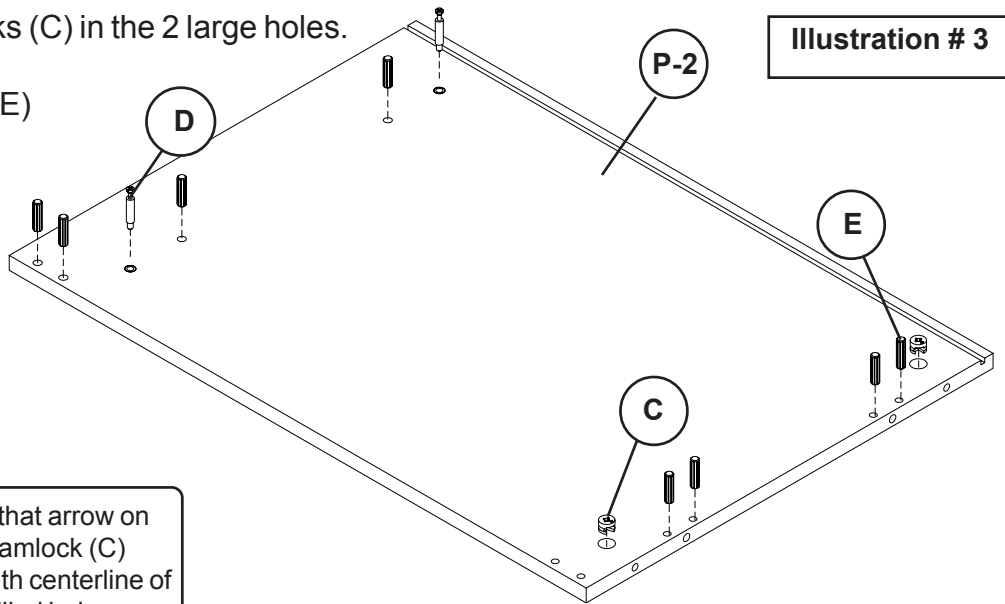


Illustration # 3

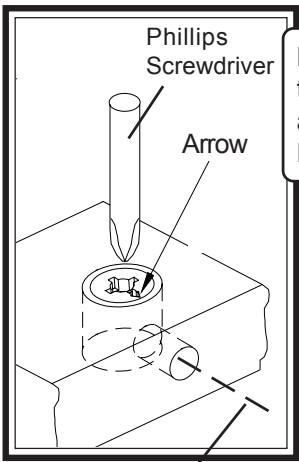

Be sure that arrow on top of Camlock (C) aligns with centerline of Edge Drilled hole.

**Should you require assistance during assembly, please call our Customer Service Department Monday - Friday 8 a.m. - 5 p.m. Central Standard Time Toll-Free Customer Service 1-800-749-2258**

Centerline of Edge Drilled hole.

10. Place the Bottom Panel (P-3) with the Pre-drilled holes facing up and install 4 Cam Locks (C) in the 4 large holes as shown in illustration # 4.

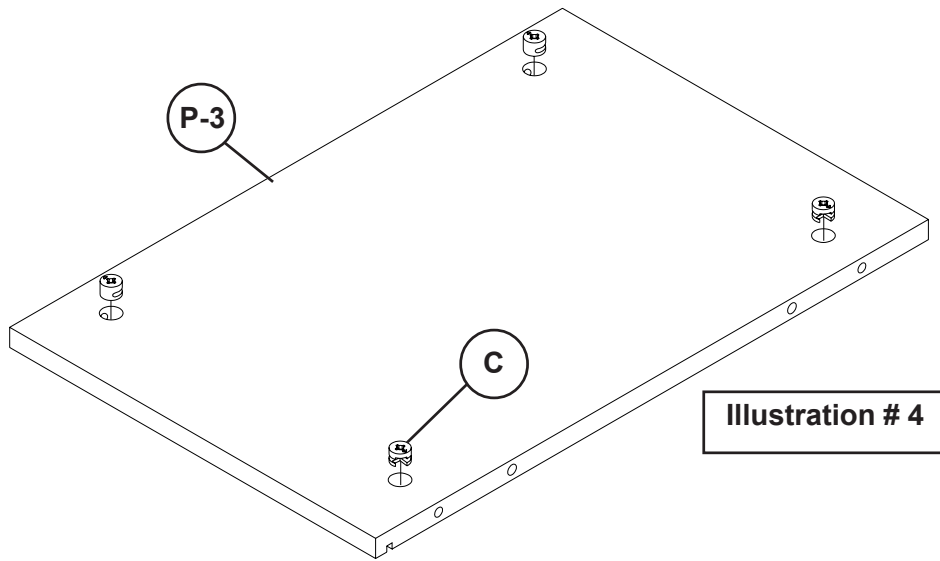




Illustration # 4

Do not use unless all screws are tight. At least every six months, check all screws to be sure they are tight. If parts are missing, broken, damaged, or worn, stop use of the product until repairs are made by your dealer using factory authorized parts.

11. Slide Bottom Panel (P-3) over the Wood Dowels (E) and the Camposts (D) in the Right Side Panel (P-2) as shown in illustration #5. Secure by turning the Cam Locks (C) 1/4 turn until they lock.

Illustration # 5

12. Slide 2 Top Supports (P-5) over the Wood Dowels (E) in the Right Side Panel (P-2).

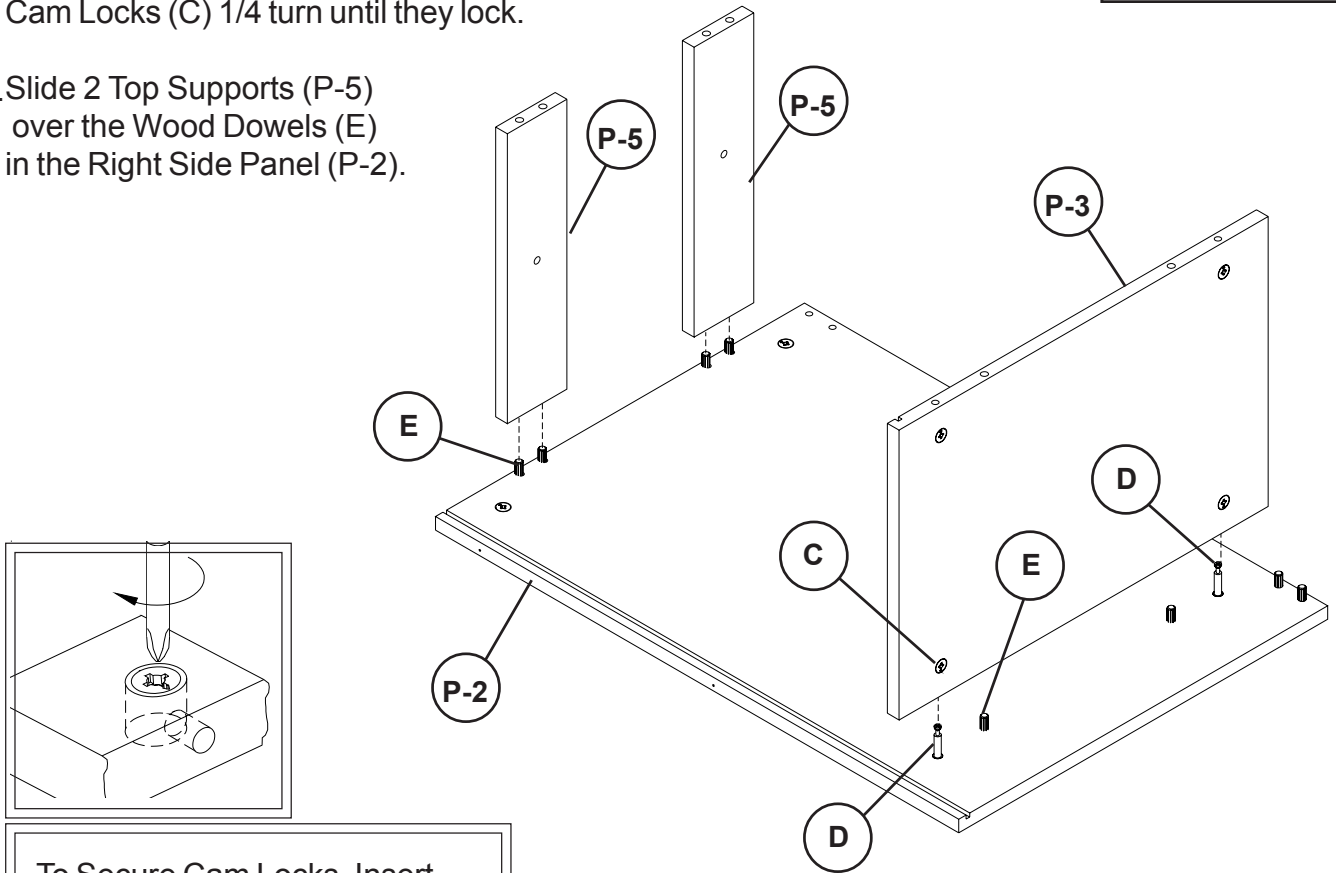

To Secure Cam Locks, Insert Large Phillips Head Screwdriver and turn Cam Lock 1/4 turn (90 degrees) clockwise.


Illustration # 6

13. Slide Bottom Front Brace (P-7) over the Wood Dowels (E) in the Right Side Panel (P-2) as shown in illustration #6.

14. Attach Left Side Panel (P-1) to Bottom Panel (P-3), Top Support (P-5), and Bottom Front Brace (P-7) as shown in illustration # 6.

15. Secure by turning the Cam Locks (C) 1/4 turn until they lock.

16. Use a hammer to install 4 Plastic Glides (F1) in the bottom of Left Side Panel (P-1) and Right Side Panel (P-2) as shown in illustration #6.

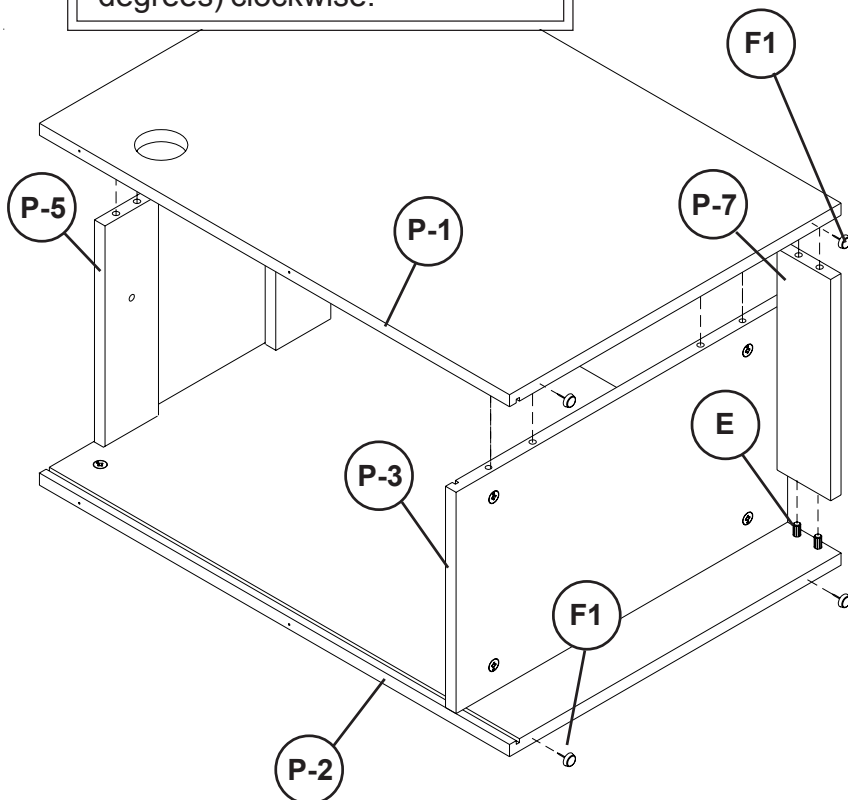

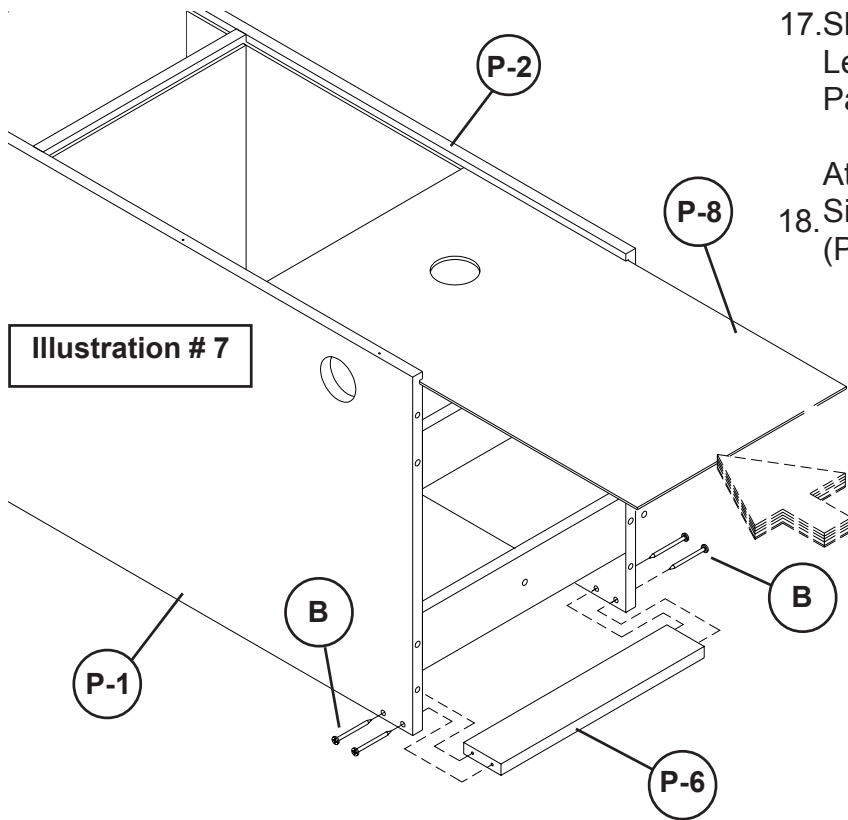


Illustration # 7

17. Slide Back Panel (P-8) into groove in the Left Side Panel (P1) and the Right Side Panel (P2) as shown in illustration # 7.

18. Attach Top Front Brace (P-6) to the Left Side Panel (P1) and the Right Side Panel (P2) using 4 Screws (B).


19. Place the Table Top (P-4) with the Predrilled holes facing up and install 4 each Cam Posts (D) in the 6 threaded insert nuts (Pre-installed) as shown in illustration # 8.

20. Install 4 Wood Dowels (E) into the 4 holes in the Table Top (P-4) as shown in illustration # 8.



Illustration # 8

Wood CPU Assembly

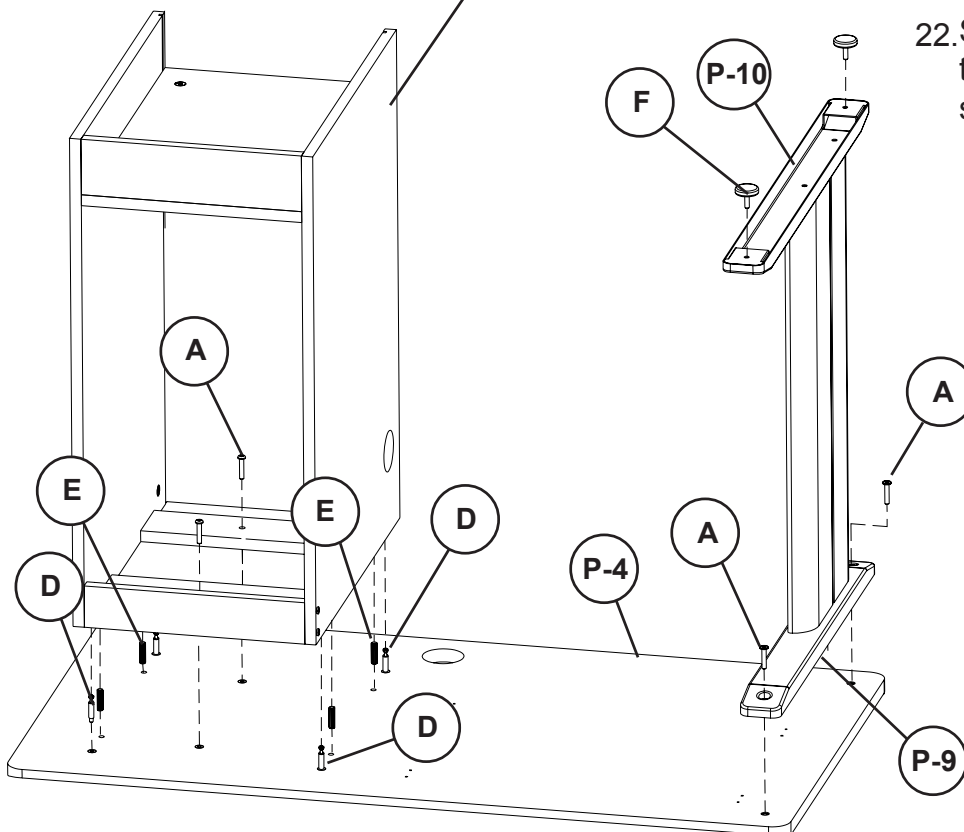


21. Slide Wood CPU Assembly over the Wood Dowels (E) and the Camposts (D) in the Table Top (P-4) as shown in illustration # 8. Turn the Cam Locks (C) 1/4 turn until they lock.

22. Secure Wood CPU Assembly to the Table Top (P-4) using 2 screws (A).

23. Attach Upper Leg Mount (P-9) to the Table Top (P-4) using 2 Screws (A) as shown in illustrations # 8. Tighten Screws using Allen Wrench (J).

24. Install 2 Leveling Glide (F) in the bottom of the Lower Leg Mount (P-9) as shown in illustration # 8.

Illustration # 9

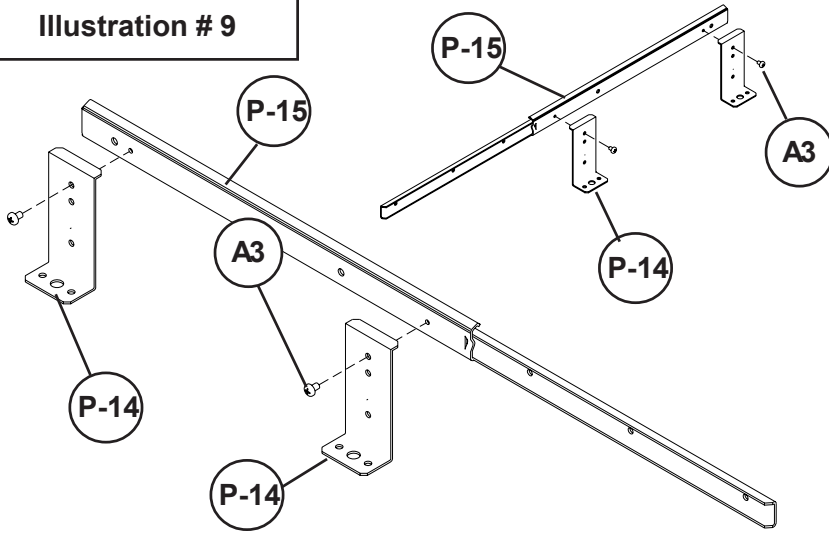


25. Attach 2 Keyboard Brackets (P-14) to 1 Keyboard Slide (P-15) using 2 Screws (A3) as shown in illustrations # 9.


26. Attach 2 Keyboard Brackets (P-14) to 2nd Keyboard Slide (P-15) using 2 Screws (A3).  
**Note: The 2 Slides will have Brackets on the opposite sides.**

27. Attach 2 Keyboard Slides (P-15) to the Plastic Keyboard Tray (P-13) using 4 Screws (B2) as shown in illustrations # 10.

Illustration #10

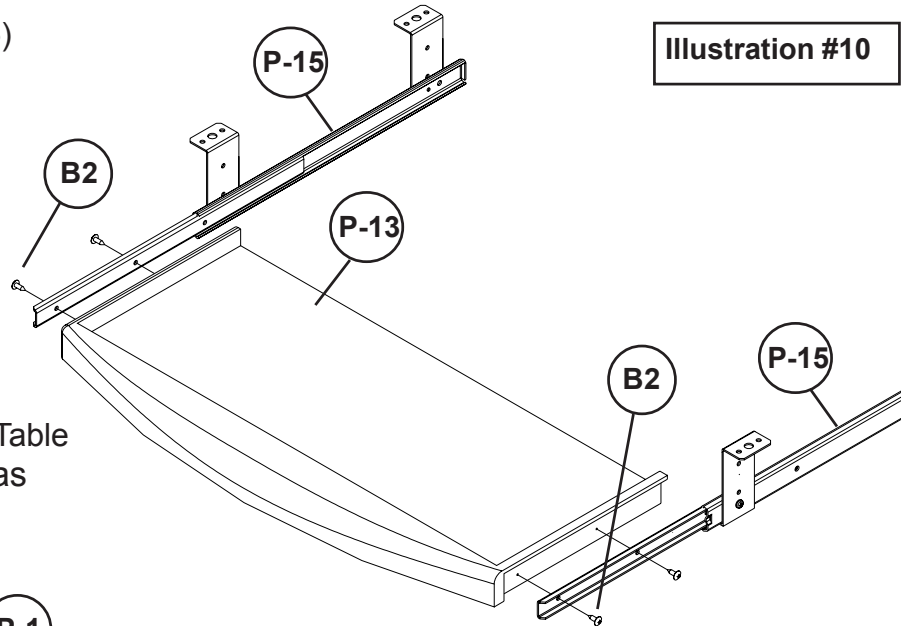

28. Attach Keyboard Drawer to the Table Top (P-4) using 8 Screws (B2) as shown in illustrations # 11.

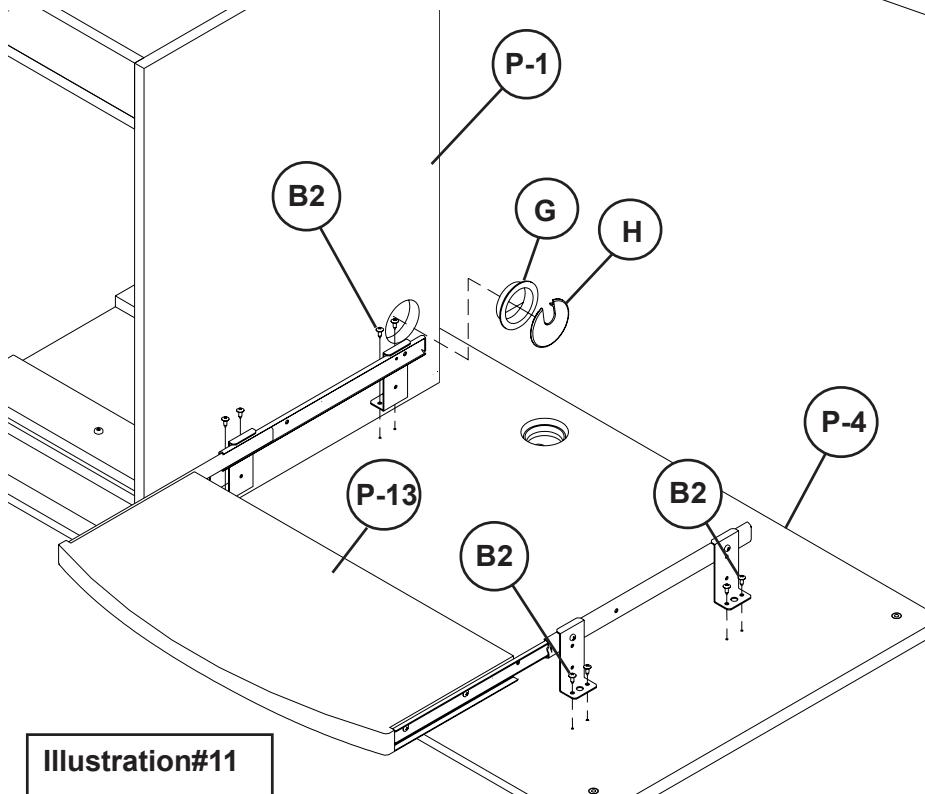

Illustration#11

29. Insert 1 Grommet Sleeve (G) in Round opening in the Left Side Panel (P-1) as shown in illustrations #11.


30. Snap 1 Grommet Cap (H) into Grommet Sleeves (G).

31. Attach Metal Panel (P-12) to the Left Leg Assembly using 2 Phillips Screws (A1) as shown in illustrations # 12.


32. Attach Metal Panels (P-12) to the Wood CPU Assembly using 2 Wood Screws (B1) as shown in illustrations # 12.



Illustration#12

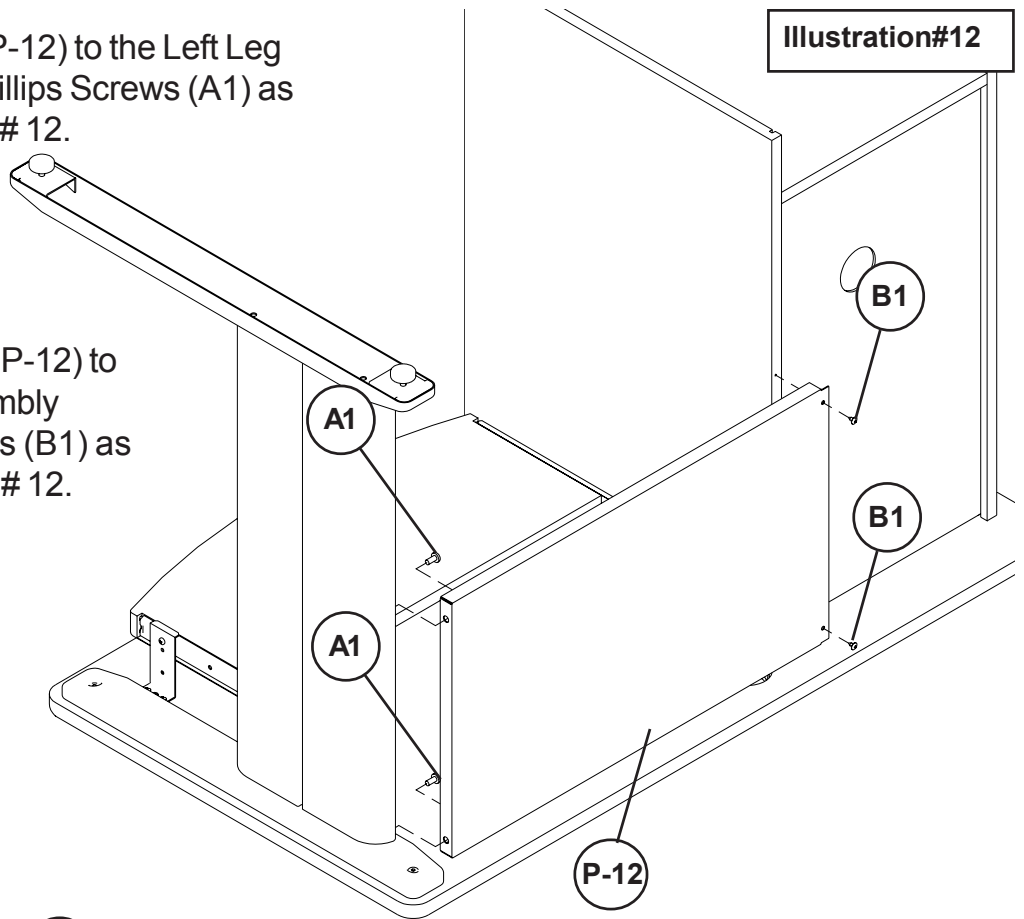

Illustration#13

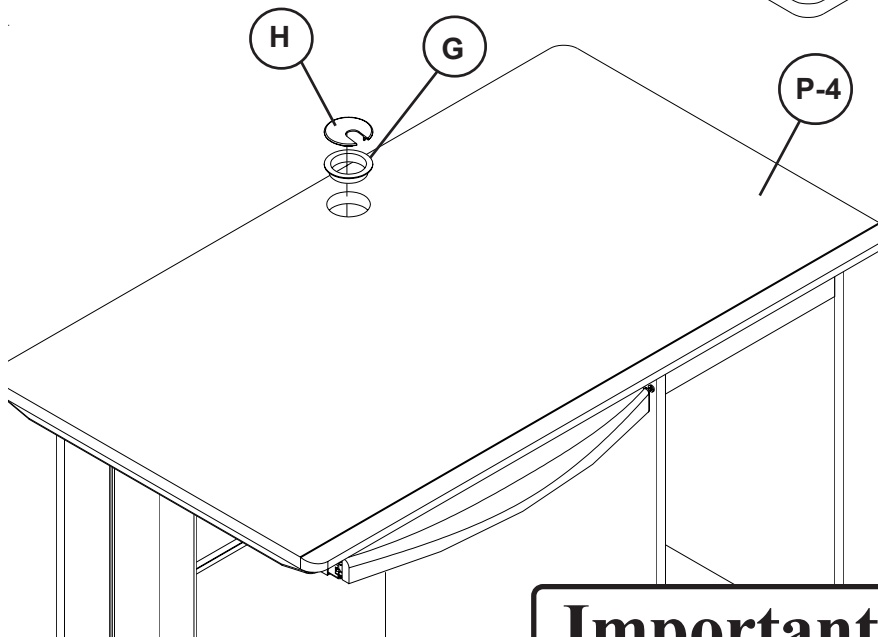

33. Insert 1 Grommet Sleeve (G) in Round opening in Table Top (P-4) as shown in illustration #13.

34. Snap Grommet Cap (H) into Grommet Sleeve (G) as shown in illustration #13.

## Important

The Balt product you have purchased is guaranteed against material and workmanship defects. This guarantee extends 1 year from date of purchase. Should this product fail to function satisfactorily under normal use due to defect or imperfection, the defective part or product will be replaced. Damage caused by common carriers during shipment is not included in this guarantee.

**This guarantee sets forth all applicable guarantees and remedies. No other warranty, expressed or implied shall apply. Failure to follow instructions found in Important Information Section of Owner Sheet shall void the guarantee. Consequential or incidental damages and or costs are not refundable.**