

27" Full HD SuperClear[®] IPS LED Monitor

Frameless Bezel Design and Advanced HDMI® Connectivity

VA2759-smh

Available for this model: **Privacy Filter Screen Protector** VSPF2700 (Sold Separately)



With flexible connectivity, wide-angle viewing, and amazing screen performance, the ViewSonic[®] VA2759-smh delivers solid multimedia features and a sleek design at a great value. Featuring SuperClear IPS panel technology, the VA2759-smh delivers stunning color and contrast at nearly any viewing angle. A minimalistic design, edge-to-edge screen, and frameless bezel make this an ideal monitor for nearly seamless multi-screen setups. Whether for working at the office, or enjoying entertainment at home, the VA2759-smh also features an HDMI port for flexible connectivity to PCs, laptops, gaming consoles, and other multimedia devices. In addition, a 3-year limited warranty, along with one of the industry's best pixel performance policies, makes the VA2759-smh a great overall value choice.


Key Features:

SuperClear IPS panel technology Frameless design Versatile connectivity Full HD 1080p resolution Superior color rendering and intuitive settings Designed for: Business Home

27" Full HD SuperClear[®] IPS LED Monitor



VA2759-smh

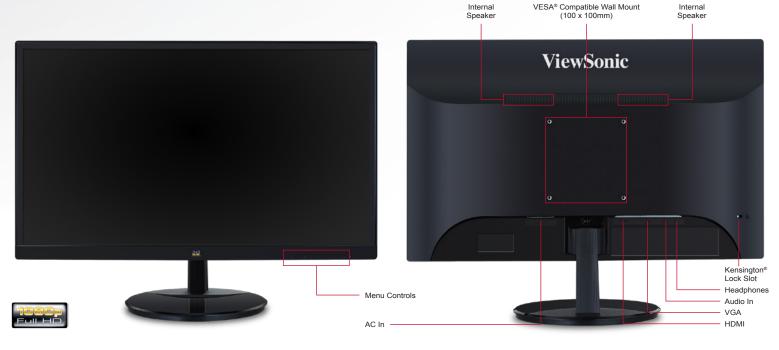

Specifications

LCD PANEL	Type Display Area Optimum Resolution Brightness Contrast Ratio Dynamic Contrast Ratio Viewing Angles Colors Response Time Backlight Backlight Life Panel Surface	IPS Type, a-si TFT Active Matrix LCD 23.5" horizontal x 13.2" vertical; 27.0" diagonal 1920x1080 250 cd/m² (typ.) 1000:1 (typ.) 50M:1 178° horizontal, 178° vertical 16.7M (6bit + A-FRC) 5ms (GtG) White-light LED 30,000 hours (min.) Anti-glare, hard-coating (3H)
VIDEO INPUT	Digital Analog Frequency Sync	HDMI VGA Fh: 54~85.5kHz, Fv: 48~76Hz Separate Sync, Composite Sync, Sync on Green, TMDS
AUDIO OUTPUT	Speakers	2-watt (x2)
COMPATIBILITY	PC Mac®	Up to 1920x1080 non-interlaced Up to 1920x1080
CONNECTOR	Video In Audio In Headphones Power	HDMI, VGA 3.5mm mini jack 3.5mm mini jack 3-pin plug (CEE22)
CONTROLS	Front Panel Buttons OSD	1, 2, Down, Up, Power Auto Image Adjust, Contrast/Brightness, Input Select, Audio Adjust, Color Adjust, Information, Manual Image Adjust, Advanced Image Adjust, Setup Menu, Memory Recall (See user guide for complete OSD functionality)

ERGONOMICS	Tilt	Forward 5° / Back 22°
POWER	Voltage Consumption Optimize Conserve	AC 100–240V (universal), 50 / 60Hz 26W (typ.) / 29W (max.) 22W (typ.) 17W (typ.)
OPERATING CONDITIONS	Temperature Humidity	32–104° F (0–40° C) 20–90% (non-condensing)
DIMENSIONS (W x H x D)	Physical with Stand Physical without Stand Packaging	24.5 x 17.6 x 9.3 in. / 622.5 x 446.3 x 235 mm 24.5 x 14.7 x 1.9 in. / 622.5 x 372.8 x 48.6 mm 27.3 x 20.3 x 6.5 in. / 693 x 516 x 164 mm
WEIGHT	Net with Stand Net without Stand Gross	9.9 lb. / 4.5 kg 8.8 lb. / 4.0 kg 15.2 lb. / 6.8 kg
WALL MOUNT	VESA compatible	100 x 100 mm
REGULATIONS		CE EMC, CB, RoHS Green BOM & RoHS DoC, REACH SVHC List and DoC, ErP, WEEE, US NRTL w/ CA, FCC-B w/ ICES003, ENERGY STAR, EPEAT Silver, Mexico CoC, Mexico Energy
RECYCLE/DISPOSAL		Please dispose of in accordance with local, state, or federal laws
WARRANTY		Three-year limited warranty on parts, labor and backlight

Optional Accessories

HDMI to DVI cable 6FT Desktop Display Wall Mount Kit .

.. CB-00008948 .. LCD-WMK-001

What's in the box?

VA2759-smh monitor, Power cable, Audio cable, VGA cable, Quick Start Guide, ViewSonic Wizard CD







Programs, specifications and availability are subject to change without notice. Selection, offers and programs may vary by country; see your ViewSonic representative for complete details.Corporate names, trademarks stated herein are the property of their respective companies. Copyright © 2016 ViewSonic Corporation. All rights reserved. [18462-00B-01/16]

www.viewsonic.com