


UK +44 (0)151 220 2500 // USA +1 855 958 2502 // JAPAN +81-3-3683-0509
www.brainboxes.com // sales@brainboxes.com

PX-25703

2 Port PCI Express RS232 Serial Adaptor Dual Profile


Fast and reliable PCI Express card offering two RS232 Serial Ports. Brackets included for both full height and low profile installation.

- 2 port RS232
- PCI Express x1, x4, x8 x16 lane slots socket size
- Comes with bracket options for both standard and low profile installation
- 128 Byte tx and 128 Byte Rx FIFOs
- Up to 921,600 Baud
- DB9 connector (9 pin Male)
- Drivers for all popular operating systems

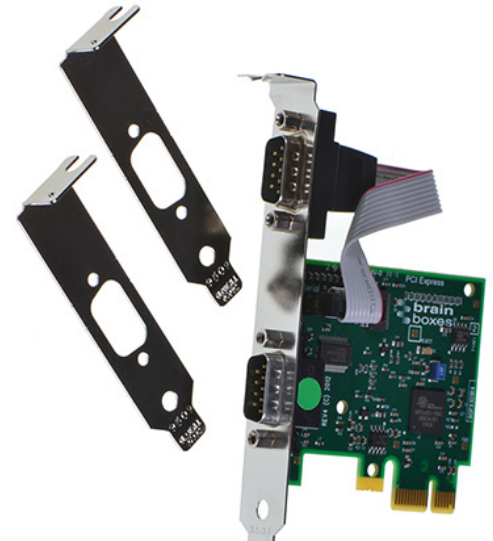

PCI Express Card providing two RS232 serial ports. Data transfer rates up to 921,600 baud rates and the 128 byte deep transmit and 128 byte receive FIFOs, delivers uncompromising performance on your PC. Drivers for Windows 32 bit and 64 bit operating Systems from legacy through to Windows10.

With Brainboxes' industry renowned Lifetime Warranty and Lifetime Support!

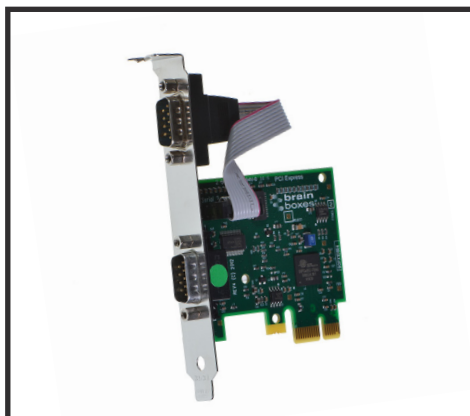

Full Height Bracket



Low Profile Bracket







Reliable software

Full product documentation, a thorough troubleshooting guide and terminal software. Detailed sample source code for many popular programming languages.

UK +44 (0)151 220 2500 // USA +1 855 958 2502 // JAPAN +81-3-3683-0509
 www.brainboxes.com // sales@brainboxes.com

PX-25703

2 Port PCI Express RS232 Serial Adaptor Dual Profile

Port RS232 	Ports Connector FIFO size Operating Distance Cable	2 x RS232 DB9 Connector - 9 Pin Male 128 RX FIFO + 128 TX FIFO EIA - RS232 Standard No Cable - Integrated Connector
Port Settings 	Baud Rate Data Bits Parity Stop Bits Flow Control Tx/Rx Modes	921,600 5,6,7 or 8 Odd, Even, None, Mark or Space 1, 1.5 or 2 RTS/CTS, DSR/DTR, XON /XOFF Point to Point
Interface 	OS Compatibility BUS	Microsoft Windows 10, 8 & 7 32 bit 64 bit Editions Windows Server 2008 32 bit 64 bit Editions Windows Vista 32 bit 64 bit Editions Windows Server 2003 32 bit 64 bit Editions PCI Express x1, x4, x8 x16 lane slots
Approvals	Other Approvals	AEO C-TPAT Microsoft Certified Gold Partner WEEE RoHS METL EMC: CE TAA
General	PCB Layers Power Consumption Weight Size	4 380mA @ 3.3V 0.065 kg 130(l) x 18(w) x 120(h) mm
	GTIN (barcode)	837324003901
Box Content	Packaging Card	Installation CD including manual, Microsoft signed drivers & utilities PCIe 2xRS232 1MBaud with standard height bracket Additional Bracket for low profile option
Product Support 	Warranty Support	Lifetime (online registration required - www.brainboxes.com) Lifetime Web, Email and Phone Support from fully qualified, friendly staff who work in and alongside the Product Development Team
Additional 	OEM option Made In Customisable	Available for bulk buy OEM Manufactured in the UK by Brainboxes Winner 2005 European Electronics Industry Awards "Manufacturer of the Year" Brainboxes operate a "Perfect Fit Custom Design" policy for volume users. More Info: sales@brainboxes.com