

4-Port USB 2.0 Cat 5 Extender over LAN

UEH4102

- The UEH4102 4-port USB 2.0 Extender over LAN incorporates patented ExtremeUSB® technology that enables users to extend beyond the standard 5 meter cable limit for USB peripheral devices.


UEH4102 provides true USB 2.0 extension at up to 480 Mbps across a Gigabit Ethernet Local Area Network (LAN). The Local and Remote units are pre-paired with each other through MAC address – no pairing action required during installation.

A true plug-and-play solution, the UEH4102 is compatible with all leading operating systems, and supports all USB peripherals, such as keyboards, mice, interactive white boards, flash drives, hard drives, audio devices, web cameras and any other USB device. The UEH4102 harnesses the full capability of the USB 2.0 standard that provides a durable, reliable and high-quality data communication.



Features

- Extends USB transmission over a Gigabit Ethernet Local Area Network (LAN)
- ExtremeUSB® – supports transparent USB 2.0 signals and true plug-and-play (no software or drivers required)
- Pre-paired networked configuration through MAC Address for simple installation. No pairing action required
- Supports automatic connection link between Local and Remote units through DHCP
- Up to 100m between extender and switch and between switches over CAT 5e/6/7 cables
- Operates with all USB peripherals - flash drives, keyboards, mice, webcams, interactive whiteboards, and more
- Works with all major operating systems: Windows®, OS X®, and Linux®

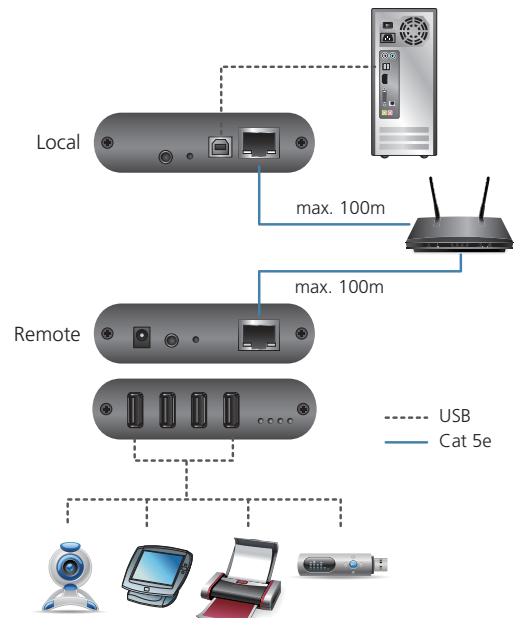

Specifications

| Function | UEH4102L | UEH4102R |
|------------------------------|---|-----------------------------|
| Connectors | | |
| USB Port | 1 x USB Type B Female | 4 x USB Type A Female |
| Link | 1 x Gigabit Ethernet Female | 1 x Gigabit Ethernet Female |
| Power | N/A | 1 x DC Power Jack |
| USB Specification | USB 2.0 High/Full/Low Speed | USB 2.0 High/Full/Low Speed |
| USB Devices Supported | N/A | 4 USB Devices |
| Power Consumption | Bus-Powered | Self-Powered DC 5V, 15W |
| Network Protocol | 10/100/1000 BASE-T Ethernet (recommand 1000 BASE-T Ethernet for best performance) | |
| Environmental | | |
| Storage Temperature | -20° - 70° C | -20° - 70° C |
| Humidity | 0 - 80% RH, Non-condensing | 0 - 80% RH, Non-condensing |
| Operating Temperature | 0° - 50° C | 0° - 50° C |
| Physical Properties | | |
| Housing | Metal | Metal |
| Weight | 0.19 kg | 0.19 kg |
| Dimensions (L x W x H) | 10.00 x 7.60 x 2.60 cm | |

Product information is subject to change without prior notice.

ATEN International Co., Ltd.

3F., No.125, Sec. 2, Datong Rd., Sijhih District., New Taipei City 221, Taiwan
 Phone: 886-2-8692-6789 Fax: 886-2-8692-6767
 www.aten.com E-mail: marketing@aten.com

Publish Date: 07/2018 V1.0



© Copyright 2018 ATEN® International Co., Ltd.
 ATEN and the ATEN logo are trademarks of ATEN International Co., Ltd.
 All rights reserved. All other trademarks are the property of their respective owners.