



# Chromebox Commercial 2

*Powerful, Commercial Grade Chrome OS Device, that drives up to two UHD (4k) screens*

This Commercial Grade Chrome OS device is specifically designed for digital signage and kiosk applications.


The AOPEN Chromebox Commercial 2 is a highly reliable and powerful device that operates 24/7 under tough conditions (up to 40°C). It sets itself apart from any Chromebox, being the only commercial grade Chromebox. The Chromebox Commercial 2 is fanless and has the capability to run one UHD (4k) screen @60Hz, or two UHD (4k) screens @30Hz.

## **Chrome Device management**

Deployment and management of the devices have never been easier using Chrome Device Management. Use the signage app of your preference available via the Chrome Web Store to control what's on the screen.

## *The advantages of the Chromebox Commercial 2:*

- Runs 1 UHD (4k) display @60Hz or two UHD (4k) displays @30Hz
- 24/7 Operability in public spaces
- Small form factor for easy installment behind displays or integration in kiosks
- The solid-state and fanless design ensure a first-rate performance in challenging or moving situations.
- AC Power Auto Recovery (APAR).
- Included dual band antenna offers a wide reach.
- Options for kiosk and POS device extensions via commercial ports.
- Optional Chrome Device Management on request to save valuable time and thus costs on installation, programming and maintenance.

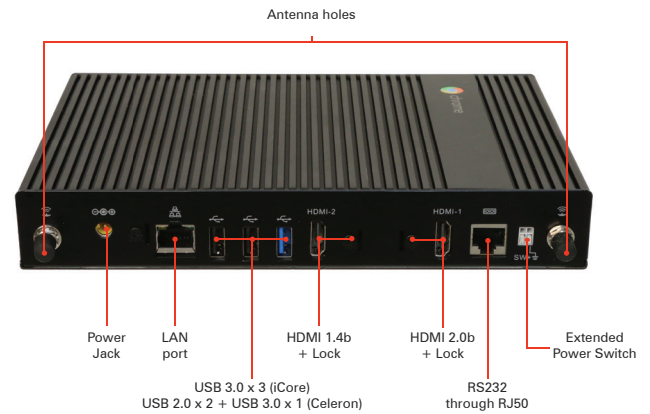

# Chromebox Commercial 2

Specifications			Rear Panel I/O	
Feature	First Commercial Grade and Fanless Chromebox to power 4K screens.		DC Jack	x 1
Operating System	Chrome OS		HDMI Port	x 2 (+Lock) 1.4b and 2.0b
Housing Material	Aluminum / SECC		USB 2.0 Port	x 2 (Celeron SKU) - (Core i SKU)
Chassis Colour	Black		USB 3.0 Port	x 1 (Celeron SKU) x 3 (Core i SKU)
Dimensions	W x H x D (mm)	213 x 147 x 32 mm	eSATA Port	-
	W x H x D (inch)	8.39 x 5.79 x 1.26 inch	RJ45 LAN Jack	x 1
Weight	1.7 kg / 3.75 lb		Legacy RS232 serial port	x 1 Available through RJ50
CPU/Chip set	Type	Intel® Celeron 3865U / Intel® Core i3-8130	Audio Set	Line-out - Line-in -
	Memory	DDR4 4G	Antenna Holes	x 2 (Dual band antenna)
Graphics	Chip	Intel® HD Graphics Integrated on CPU	Kensington Lock	x 1
	WiFi	WiFi Module Intel® 7265 M.2 802.11ac + Bluetooth 4.2	Others	x 1 Extended Power Switch x 1 RJ50 port
Audio	Type	3.5mm Audio Jack x 1(combo)	Watchdog Timer	-
	Channel	5.1	Adapter	19V/65W AC adapter (Celeron sku) 19V/90W AC adapter (Core i3 sku)
LAN	GbE LAN		Input Voltage	AC 100 ~240 V
Storage	32G SSD		Environment	
Front Panel I/O	USB 2.0 Port	-	MTBF	50,000 hrs
	USB 3.0 Port	x 2	Operating temperature	0 ~40 °C
	Others	Audio Jack (Combo)	Storage temperature	-30 ~60 °C
TPM	2.0		Relative Humidity	-90% RH

