NET:PATIBLES

USB-C Triple Display MST Docking Station with 100W Power Delivery

DC Power Input

USB-C 100W Power Delivery

HDMI

Display Port

USB 3.0

Gigabit Ethernet

3.5mm Audio Jack

SD Card Reader

TF Card Reader

USB 3.0 BC 1.2
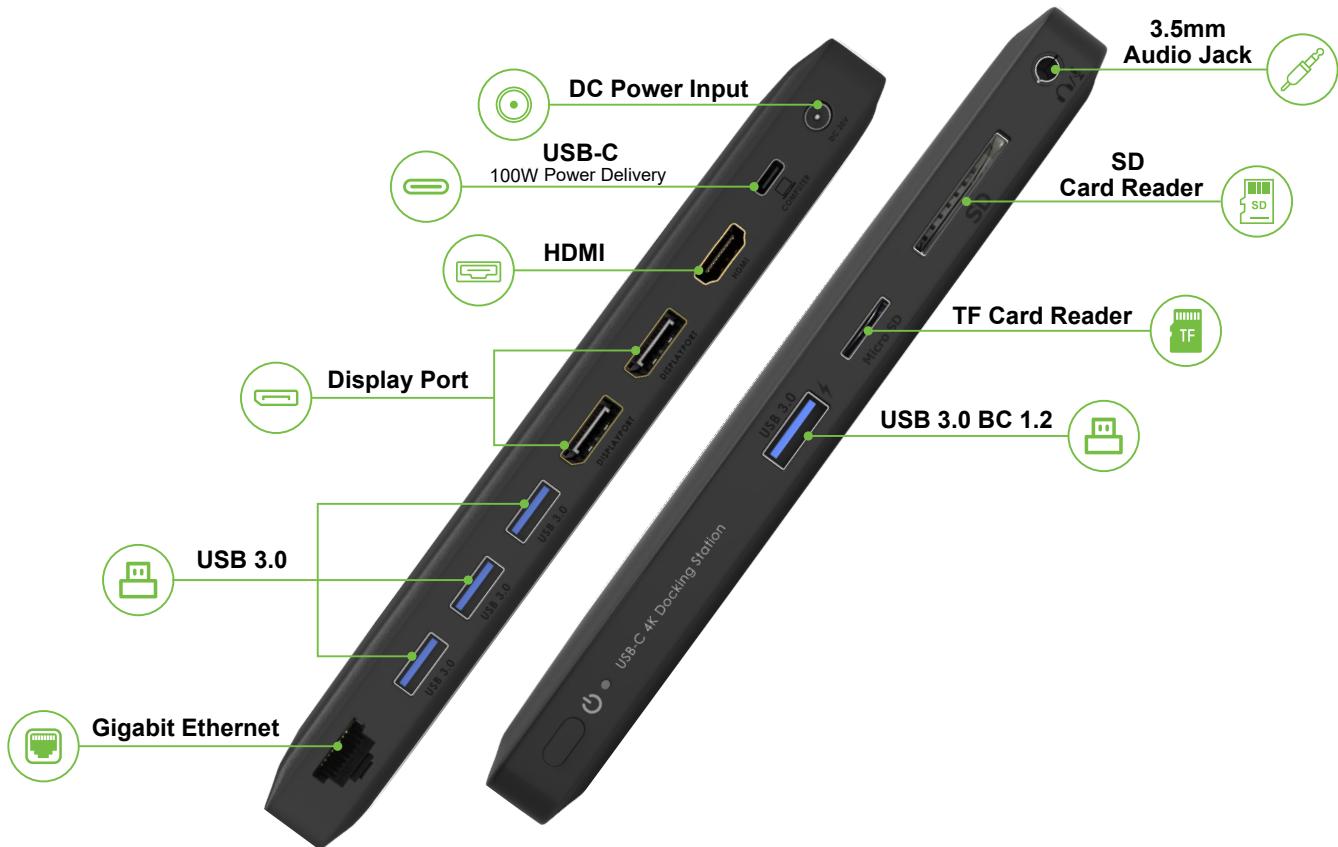
FEATURES

- 12 Port USB-C Docking Station
- USB-C Power Delivery with 4 profile support with 100W charging
- Supports up to 4k resolution and triple displays
- Slim and flat profile
- Support OS Windows 7/8/10

NET:PATIBLES

VIDEO					
Port	**Placement**	**Specification**	**Resolution**	**HDCP**	**Chipset**
(2) Display Port	Rear	V1.4	3840x2160@ 60Hz	HDCP2.2	VMM5320
(1) HDMI	Rear	V2.0b	3840x2160@ 60Hz	HDCP2.2	VMM5320

	Single	**Dual**	**Triple**
Display Port / HDMI	3840x2160 @ 60Hz	2560x1440 @ 60Hz	1920x1080 @ 60Hz
DVI/VGA Adapter	1920x1080 @ 60Hz	1920x1080 @ 60Hz	1920x1080 @ 60Hz

AUDIO			
Port	**Placement**	**Max Bit Depth and Sample Rate**	**Chipset**
Display PortWW	Rear	1-32 channels of LPCM audio including HBR audio rates	VMM5320
HDMI	Rear	1-32 channels of LPCM audio including HBR audio rates	VMM5320
3.5mm Headset Jack	Front	44.1, 48, and 192KHz Sample Rate, 16/24-bit	ALC4040

POWER					
Port	**Placement**	**Connection**	**Voltage**	**Amperage**	**Wattage**
USB-C	Rear	To Host	20V	3.25A	65W (Charge to Host)
DC Power	Rear	To Device	20V	5A	100W

USB					
Port	**Placement**	**Version / Transfer Rate / Feature**	**Voltage**	**Amperage**	**Wattage**
(1) USB-A	Front	USB 3.0 / 5Gbps / BC 1.2	4.75-5.25V	1.5A	7.5W
(3) USB-A	Rear	USB 3.0 / 5Gbps	4.75-5.25V	0.9A	4.5W

NETWORK					
Port	**Placement**	**Version**	**Transfer Rate**	**Features**	**Chipset**
Gigabit Ethernet	Rear	IEEE 802.3	1Gbps	Integrated 10/100/1000M transceiver	RTL8153B

CARD READER					
Port	**Placement**	**Specification**	**Transfer Rate**	**Support**	**Max Capacity**
SD Card Reader	Front	V3.01	Memory Card Dependent	SDHC/SDXC	2TB
Micro SD Card Reader	Front	V3.01	Memory Card Dependent	SDHC/SDXC	2TB

NET:PATIBLES

SPECIFICATIONS	
Color	Gray
Operating Systems	Windows
Max Resolutions	4K @ 60Hz
Max Charging Current	3.25A
Rated Voltage	100-240 VAC
Power Supply	DC20V/5A 100W
Power Plug	DC Jack
Power Consumption	97W
Operating Tempature	0ºC~40ºC
Material	Plastic, Alumnium

PORTS
(2) DisplayPort
(1) HDMI
(4) USB 3.0 (with 1 BC1.2 fast charging)
(1) Gigabit Ethernet
(1) Micro SD Card Reader
(1) SD Card Reader
(1) 3.5mm Audio Jack
(1) USB-C 100W Power Delivery
(1) DC Power Input

DIMENSIONS	
Unit Dimensions	8.14 x 3.3 x 0.74 in
Unit Weight	2.74
Package Dimensions	10.47 x 5.19 x 2.99 in
Package Weight	3 lbs

PACKAGE CONTENTS
(1) USB-C Triple Display Docking Station
(1) 100W Power Adapter (DC20V/5A)
(1) USB-C to USB-C Cable
(1) Quick Installation Guide

ORDER TODAY FOR QUICK DELIVERY!